

# Summary | Hydraulic Machinery

## Introduction |

| Positive Displacement | Piston pump, Rotary pump | Motors | Hydraulic Ram, Jack Press | | Rotodynamic | Pumps, Compressors | Turbines | Hydraulic coupling, Torque converter |

### **i** Note

In s1, only rotodynamic [pumps](#) and rotodynamic turbines are studied.

## Pumps

Energy flow direction is machine to fluid.

### Vane

A curved blade used in a pump.

### Impeller

Set of vanes attached to a disc or a cylinder. Main rotating element in a pump.

In a pump, impeller is mounted on a shaft. The shaft is driven by an electric motor or IC engine.

## Direction of the fluid flow

### Axial flow

Fluid enters and exits the impeller axially.

### Radial flow

Fluid enters the impeller axially. Leaves radially. Aka. [centrifugal pumps](#).

## Mixed flow

Fluid enters the impeller axially. Leaves in both axial and radial directions.

### **Note**

For s1, only centrifugal pumps are studied.

## Parameters

### Head provided

The head provided by a pump depends on the flow rate.

$$H = f(Q)$$

Here:

- $H$  - provided head
- $Q$  - flow rate

For a given pump running at a given speed, there is a unique variation of  $H$  and  $Q$ .

### Power input

Denoted by  $P_i$ . Varies with  $Q$ .

### Efficiency

Denoted by  $\mu$ . Varies with  $Q$ .

$$\mu = \frac{P_o}{P_i}$$

---

**Note**

$$\text{Energy per unit volume} = \frac{P_{i_A}}{Q}$$

All these parameters, plotted vs  $Q$ , is known as **performance characteristic** of the pump. Will be given by the manufacturer. Can be found by laboratory testing.

### In a pipeline system

$$H = H_0 + KQ^2$$

$H$  is the head required (or received) to create the flow rate  $Q$  in the pipeline system. The above equation is known as **system characteristic** or **system load curve**.

Here  $K$  is the loss coefficient and is given by:

$$K = \frac{8}{\pi^2 g D^4} \left( K_L + \frac{\lambda L}{D} \right)$$

**Note**

Working state of a pipeline system is given by the intersection of system characteristic and performance characteristic (of the pump) curves.

### Resultant pumps

#### In serial


When 2 pumps are operating in a series, their head inputs are added.

#### In parallel

When 2 pumps are operating in a parallel, their flow rates are added.

# Centrifugal Pumps

Most used pumps in engineering because they support wide range of heights and flow rates. Mixed flow, rotodynamic pump.

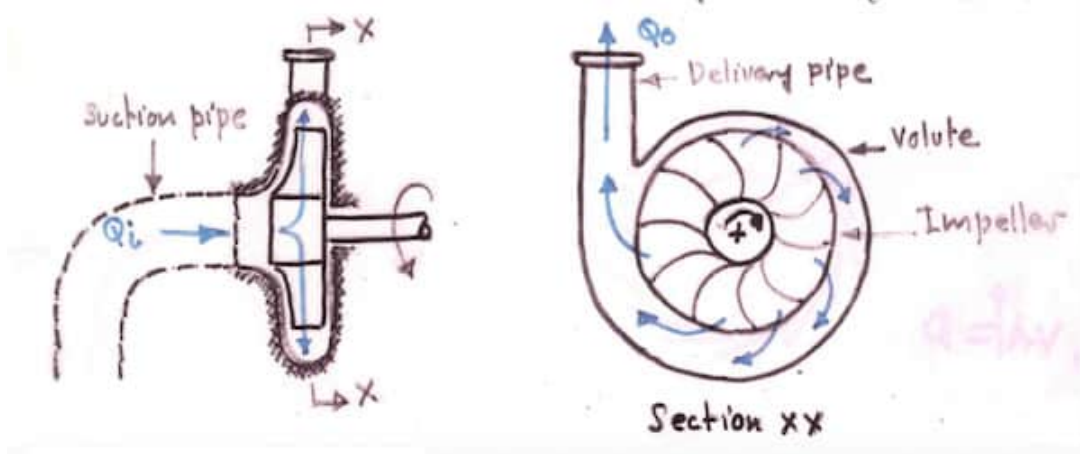

There can be a diffuser as well, which is optional.

## Volute

Casing of the impeller. A passage with increasing area, to reduce velocity (to reduce losses).

### ⓘ Note

Energy losses in a fluid flow is directly proportional to  $v^2$ .


## Diffuser

A fixed set of vanes added to the impeller. To direct the flow into the volute, to minimize impact losses.

## Operation

- Volute must be filled with fluid to start pumping
- Fluid enters through the eye of the impeller
- $v$  and  $P$  are increased when the fluid flows through the impeller

## Performance characteristic

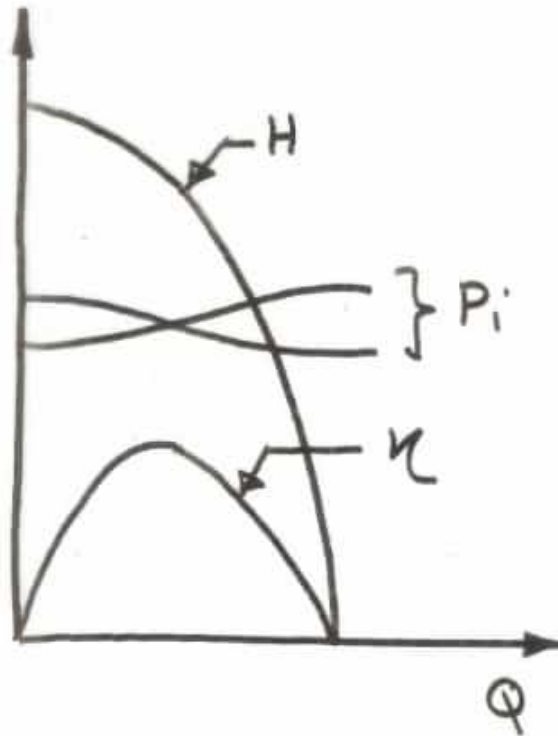

## Turbines

Used to generate electricity. Direction of energy transfer is fluid to machine.

Rotating element is called as the runner.

## Types of turbines

### Reaction turbines

Aka. pressure turbines. Similar to pumps. Operating in reverse direction (direction of fluid flow and energy transfer). Guide vanes are placed to guide fluid flow onto the runner.

3 types of reaction turbines based on the direction of fluid flow.

### Radial flow

Aka. Francis turbine. Commonly used to get a head output of 30 to 500m.

### **Axial flow**

Aka. Kaplan turbine. Commonly used to get a head output of 3 to 70m.

### **Mixed flow**

A combination of radial flow and axial flow.

### **Impulse turbines**

Aka. velocity turbines. Used for high heads. Highly efficient. Includes a runner (a wheel with buckets attached) mounted on a shaft. High velocity jet is focused on the buckets.

Efficiency of an impulse turbine is given by:

$$\mu = \frac{1}{v_1^2} (2u)(v_1 - u)(1 + k \cos \beta)$$

Here:

- $v_1$  - velocity of the jet of fluid
- $u$  - velocity of the bucket
- $k$  - loss coefficient (a little less than 1)
- $\beta$  - angle of deflection of fluid inside the bucket

$\mu$  can be considered as a function of  $u$ . And from that, the turbine works at maximum efficiency when  $2u = v_1$ .